





INSTALL IT. TRUST IT.

# AF/ArmaFlex Evo

Discover the new generation in elastomeric insulation. AF/ArmaFlex Evo. The safest AF/ArmaFlex ever.

- // Fire Safety – B/B(L)-s2,d0
- // Antimicrobial Protection – Microban
- // System reliability – One-Stop Solution
- // Environmental Product Declaration (EPD)
- // Dust and fiber free
- // Available in self-seal tube for quicker install

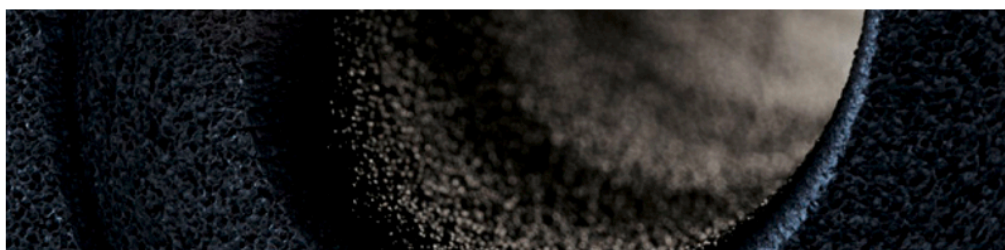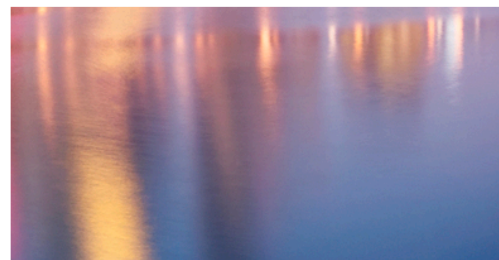

 **armacell**<sup>®</sup>  
ArmaFlex<sup>®</sup>

INSTALL IT. TRUST IT.

---

# AF/ArmaFlex<sup>®</sup> Evo

## THE SAFEST AF/ARMAFLEX EVER.

History meeting the future through generations. That's what AF/ArmaFlex stands for. For more than 40 years. We strive for perfection so you can benefit from the best ArmaFlex experience. Now it's time to discover the new generation in elastomeric insulation.

Today, in its 8<sup>th</sup> product generation, we present a new AF/ArmaFlex technology that combines excellent condensation control and energy efficiency with advanced fire safety. The new B/B<sub>L</sub>-s2,d0 product provides highest insulation reliability and contributes to the overall safety in buildings.



### // Fire safety

At Armacell, safety comes first and maximum reliability is crucial. AF/ArmaFlex Evo increases the fire safety in buildings. By mitigating the fire and smoke risk, it improves visibility and respiration, thus extending the time for evacuating a building safely in the event of a fire.

### // Antimicrobial protection

AF/ArmaFlex Evo is equipped with Microban<sup>®</sup>. These antimicrobial additives provide 'proactive' protection against harmful bacteria, mould and mildew. Armacell is the only manufacturer of flexible technical insulation materials to offer built-in antimicrobial protection.

### // Nominal wall thicknesses

Our signature product AF/ArmaFlex Evo is now also available with nominal wall thicknesses. This allows you to quickly identify which insulation thickness is required for a specific application. Our new product dimensions provide you with a wide range of inner tube diameters for a perfect fit on the various pipe dimensions providing maximum reliability to prevent condensation and energy losses.

B/B<sub>L</sub>-s2,d0

## Experience AF/ArmaFlex Evo

# The evolution of an innovation

When tradition meets the future, new products and technologies evolve. AF/ArmaFlex is our heritage product. The highly flexible insulation material with an in-built vapour barrier revolutionised the insulation industry. Today, we provide a complete range of solutions based on this innovation.



Armacell has developed the new ArmaFlex 525 adhesive to be used with AF/ArmaFlex Evo.



### // System reliability

AF/ArmaFlex Evo is more than a black tube or sheet. Armacell provides solutions where individual components fit flawlessly together and are tested as a system. Our ArmaFlex Protect passive fire protection solution, flexible cladded Arma-Chek® 2-in-1 products and ArmaFlex adhesives complement and strengthen the system to guarantee long-term functionality.

### Udo Dohlen

#### Owner and managing director of Dohlen Isoliertechnik, Stolberg (Germany)

*"AF/ArmaFlex isn't just any black tube or sheet. When we insulate our customers' mechanical equipment we make sure to use the best product in the market: AF/ArmaFlex. An investment that pays off. For us and for our customers. Now we can help to make people's homes even safer. AF/ArmaFlex Evo releases 50 percent less smoke in case of fire."*

## TECHNICAL DATA - AF/ARMAFLEX EVO

Brief description	Flexible elastomeric foam with improved fire-retardant properties, low smoke generation, closed-cell insulation material structure and built-in Microban antimicrobial protection. For use in HVAC, refrigeration and process equipment application.
Material type	Elastomeric foam based on synthetic rubber. Factory-made flexible elastomeric foam (FEF), according to EN 14304.
Additional material information	Self-adhesive coating: pressure-sensitive adhesive coating on modified acrylate basis with mesh structure, covered with polyethylene foil. Traces of silicon can be found on the protection paper/foil used to protect self-adhesive closures.
Product colour range	Black
Special features	This product is infused with Microban antimicrobial protection to provide additional assurance against mould and mildew growth in the insulation.
Applications	Insulation/protection for pipes, air ducts, vessels (including elbows, fittings, flanges, etc.) of air-conditioning/refrigeration and process equipment to prevent condensation and save energy.
Installation	Please refer to the ArmaFlex application manual for advice.
Declaration of performance	Declaration of Performance in accordance with Article 7(3) of Regulation [EU] No 305/2011 is available at <a href="http://www.armacell.com/DoP">www.armacell.com/DoP</a> .

Property	Value / Assessment		Standard / Test method
<b>Temperature range</b>			
Service temperature	Min. °C <sup>1</sup>	Max. °C <sup>2</sup>	EN 14706, EN 14707, EN 14304
	-50	110	
	Remarks	+85 °C if sheet or tape is glued to the object with its whole surface +85 °C for tapes	
<b>Thermal conductivity</b>			
Declared thermal conductivity	Øm	0 °C	EN ISO 13787, EN ISO 8497
	$\lambda d \leq [W/(m \cdot K)]$	0.033	
	Range	Tubes (6 - 19 mm)	
	Formula	$\lambda d = [33 + 0,1 \cdot \vartheta m + 0,0008 \cdot \vartheta m^2]/1000$	
Declared thermal conductivity	Øm	0 °C	EN ISO 13787, EN 12667, EN ISO 8497
	$\lambda d \leq [W/(m \cdot K)]$	0.036	
	Range	Tubes (>25 mm) as well as sheets and tapes (3 - 32mm)	
	Formula	$\lambda d = [36 + 0,1 \cdot \vartheta m + 0,0008 \cdot \vartheta m^2]/1000$	
Declared thermal conductivity	Øm	0°C	EN ISO 13787, EN 12667
	$\lambda d \leq [W/(m \cdot K)]$	0.037	
	Range	Sheets (> 32 mm - 50 mm)	
	Formula	$\lambda d = [37 + 0,1 \cdot \vartheta m + 0,0008 \cdot \vartheta m^2]/1000$	
<b>Fire Performance and Approvals</b>			
Reaction to fire	Tubes: B(L)-s2, d0 Sheets, Tapes: B-s2,d0 Tubes with ArmaFix AF: B(L)-s2,d0 Class 0		EN 13823, EN 13501-1, EN ISO 11925-2, BS 476 Part 6
Surface flammability <sup>3</sup>	low-flammable - 2010 FTP-Code [MED 96/98/EC, Module D]		IMO 2010 FTP Code, Part 5
FM approved	4924 - Pipe and duct insulation		UBC26-3
<b>Passive fire protection</b>			
Fire resistance of elements of construction	EI 30 - EI 90		EN 13501-2, EN 1366-3

Property	Value / Assessment	Standard / Test method
<b>UL standards</b>		
UL 94 5VA <sup>4</sup>	Pass (tubes $\geq$ 3.0 mm)	UL 94, IEC 60695-11-10, UL 746B, UL 746 A
<b>Fire performance</b>		
Practical fire behaviour	Self-extinguishing, does not drip, does not spread flames, low smoke development	
<b>Resistance to water vapour</b>		
Water vapour diffusion resistance factor	Tubes (6 - 19 mm): $\mu \geq 10.000$ Tubes (>25mm); Sheets (3 - 50mm) and Tape: $\mu \geq 7.000$	EN 12086, EN 13469
<b>Physical attributes</b>		
Dimensions and tolerances	in accordance with EN 14304, table 1	EN 822, EN 823, EN 13467
<b>Weather and UV resistance</b>		
UV resistance <sup>5</sup>	Protection against UV-radiation is necessary (see Technical Bulletin no. 142).	
<b>Health and environment</b>		
Antimicrobial behaviour	In-built Microban active antimicrobial protection: No fungal growth observed	EN ISO 846, VDI 6022
Environmental Product Declaration (EPD)	Type III Environmental Product Declaration (EPD): Declaration number "EPD-ARM-20220038-IBB1-EN", Institut Bauen und Umwelt e.V. (IBU)	ISO 14025, EN 15804+A2
<b>Other technical features</b>		
Adhesion and sealing	ArmaFlex 525 is the certified adhesive for this product. However, ArmaFlex 520 adhesive can be used for tubes.	
Shelf life	Self-adhesive tapes, self-adhesive sheets, self-adhesive tubes: 1 year	
Storage	Can be stored in dry, clean rooms at normal relative humidity (50% to 70%) and ambient temperature (0 °C – 35 °C).	

<sup>1</sup> For use in temperatures beyond the maximum and minimum service temperature range indicated in the technical data table, please contact our Customer Service Centre.

<sup>2</sup> +85 °C, for products with a self-adhesive layer.

<sup>3</sup> According to IMO 2010 FTP Code annex 2, clause 2.2 a fire technical test for smoke density and toxicity is not necessary.

<sup>4</sup> Only for products without self-adhesive-layer.

<sup>5</sup> If ArmaFlex is used outdoors or in applications under UV radiation, it should be protected with a covering such as ArmaClad Arma-Chek within 3 days of installation.

Tube – standard. Black. 2m Length

6 mm			9 mm			13 mm			19 mm		
Pipe Ø [mm]	Item	Content [metric]	Pipe Ø [mm]	Item	Content [metric]	Pipe Ø [mm]	Item	Content [metric]	Pipe Ø [mm]	Item	Content [metric]
6	AF-CO-06X006	496 m	6	AF-CO-09X006	352 m	6	AF-CO-13X006	200 m	10	AF-CO-19X010	92 m
10	AF-CO-06X010	380 m	10	AF-CO-09X010	266 m	10	AF-CO-13X010	172 m	12	AF-CO-19X012	84 m
12	AF-CO-06X012	330 m	12	AF-CO-09X012	234 m	12	AF-CO-13X012	162 m	15	AF-CO-19X015	72 m
15	AF-CO-06X015	280 m	15	AF-CO-09X015	200 m	15	AF-CO-13X015	122 m	18	AF-CO-19X018	60 m
-	-	-	20	AF-CO-09X020	140 m	18	AF-CO-13X018	104 m	20	AF-CO-19X020	58 m
-	-	-	22	AF-CO-09X022	140 m	20	AF-CO-13X020	104 m	22	AF-CO-19X022	56 m
-	-	-	28	AF-CO-09X028	98 m	22	AF-CO-13X022	100 m	25	AF-CO-19X025	50 m
-	-	-	35	AF-CO-09X035	76 m	25	AF-CO-13X025	88 m	28	AF-CO-19X028	48 m
-	-	-	42	AF-CO-09X042	64 m	28	AF-CO-13X028	82 m	32	AF-CO-19X032	36 m
-	-	-	48	AF-CO-09X048	54 m	32	AF-CO-13X032	64 m	35	AF-CO-19X035	36 m
-	-	-	54	AF-CO-09X054	52 m	35	AF-CO-13X035	60 m	42	AF-CO-19X042	32 m
-	-	-	60	AF-CO-09X060	48 m	42	AF-CO-13X042	50 m	48	AF-CO-19X048	28 m
-	-	-	-	-	-	48	AF-CO-13X048	42 m	54	AF-CO-19X054	24 m
-	-	-	-	-	-	54	AF-CO-13X054	38 m	60	AF-CO-19X060	24 m
-	-	-	-	-	-	60	AF-CO-13X060	32 m	64	AF-CO-19X064	20 m
-	-	-	-	-	-	64	AF-CO-13X064	30 m	67	AF-CO-19X067	20 m
-	-	-	-	-	-	67	AF-CO-13X067	34 m	76	AF-CO-19X076	18 m
-	-	-	-	-	-	76	AF-CO-13X076	28 m	80	AF-CO-19X080	16 m
-	-	-	-	-	-	80	AF-CO-13X080	20 m	89	AF-CO-19X089	16 m
-	-	-	-	-	-	89	AF-CO-13X089	20 m	93	AF-CO-19X093	16 m
-	-	-	-	-	-	93	AF-CO-13X093	20 m	108	AF-CO-19X108	16 m
-	-	-	-	-	-	108	AF-CO-13X108	20 m	114	AF-CO-19X114	14 m
-	-	-	-	-	-	114	AF-CO-13X114	20 m	-	-	-

Other information

Thickness tolerance

≤ 8 mm: ±1,0 mm  
 9 - 18 mm: ±1,5 mm  
 19 - 31 mm: ±2,5 mm  
 > 31 mm: ±3,0 mm

Length tolerance

±1,5 %

Tube – standard. Black. 2m Length

25 mm			32 mm		
Pipe Ø [mm]	Item	Content [metric]	Pipe Ø [mm]	Item	Content [metric]
12	AF-CO-25X012	54 m	10	AF-CO-32X010	32 m
15	AF-CO-25X015	48 m	12	AF-CO-32X012	32 m
20	AF-CO-25X020	38 m	15	AF-CO-32X015	32 m
22	AF-CO-25X022	40 m	22	AF-CO-32X022	24 m
28	AF-CO-25X028	36 m	28	AF-CO-32X028	24 m
35	AF-CO-25X035	24 m	35	AF-CO-32X035	18 m
42	AF-CO-25X042	24 m	42	AF-CO-32X042	18 m
48	AF-CO-25X048	20 m	48	AF-CO-32X048	18 m
54	AF-CO-25X054	18 m	54	AF-CO-32X054	12 m
60	AF-CO-25X060	18 m	60	AF-CO-32X060	10 m
67	AF-CO-25X067	16 m	67	AF-CO-32X067	12 m
76	AF-CO-25X076	12 m	76	AF-CO-32X076	10 m
80	AF-CO-25X080	12 m	89	AF-CO-32X089	10 m
89	AF-CO-25X089	12 m	114	AF-CO-32X114	8 m
93	AF-CO-25X093	12 m	-	-	-
108	AF-CO-25X108	8 m	-	-	-
114	AF-CO-25X114	10 m	-	-	-

Other information

Thickness tolerance	≤ 8 mm: ±1,0 mm 9 - 18 mm: ±1,5 mm 19 - 31 mm: ±2,5 mm > 31 mm: ±3,0 mm
---------------------	--

Length tolerance	±1,5 %
------------------	--------

Tube – self-seal. Black. 2m Length

9 mm			13 mm			19 mm			25 mm		
Pipe Ø [mm]	Item	Content [metric]	Pipe Ø [mm]	Item	Content [metric]	Pipe Ø [mm]	Item	Content [metric]	Pipe Ø [mm]	Item	Content [metric]
15	AF-CO-09X015-A	200 m	15	AF-CO-13X015-A	122 m	15	AF-CO-19X015-A	72 m	15	AF-CO-25X015-A	48 m
20	AF-CO-09X020-A	140 m	20	AF-CO-13X020-A	104 m	20	AF-CO-19X020-A	58 m	20	AF-CO-25X020-A	38 m
22	AF-CO-09X022-A	140 m	22	AF-CO-13X022-A	100 m	22	AF-CO-19X022-A	56 m	22	AF-CO-25X022-A	40 m
28	AF-CO-09X028-A	98 m	28	AF-CO-13X028-A	82 m	28	AF-CO-19X028-A	48 m	28	AF-CO-25X028-A	36 m
35	AF-CO-09X035-A	76 m	35	AF-CO-13X035-A	60 m	35	AF-CO-19X035-A	36 m	35	AF-CO-25X035-A	24 m
42	AF-CO-09X042-A	64 m	42	AF-CO-13X042-A	50 m	42	AF-CO-19X042-A	32 m	42	AF-CO-25X042-A	24 m
48	AF-CO-09X048-A	54 m	48	AF-CO-13X048-A	42 m	48	AF-CO-19X048-A	28 m	48	AF-CO-25X048-A	20 m
54	AF-CO-09X054-A	52 m	54	AF-CO-13X054-A	38 m	54	AF-CO-19X054-A	24 m	54	AF-CO-25X054-A	18 m
60	AF-CO-09X060-A	48 m	60	AF-CO-13X060-A	32 m	60	AF-CO-19X060-A	24 m	60	AF-CO-25X060-A	18 m
-	-	-	67	AF-CO-13X067-A	34 m	67	AF-CO-19X067-A	20 m	67	AF-CO-25X067-A	16 m

Tube – self-seal. Black. 2m Length

9 mm			13 mm			19 mm			25 mm		
Pipe Ø [mm]	Item	Content [metric]	Pipe Ø [mm]	Item	Content [metric]	Pipe Ø [mm]	Item	Content [metric]	Pipe Ø [mm]	Item	Content [metric]
-	-	-	76	AF-CO-13X076-A	28 m	76	AF-CO-19X076-A	18 m	76	AF-CO-25X076-A	12 m
-	-	-	89	AF-CO-13X089-A	20 m	89	AF-CO-19X089-A	16 m	89	AF-CO-25X089-A	12 m

Other information

Thickness tolerance	≤ 8 mm: ±1,0 mm 9 - 18 mm: ±1,5 mm 19 - 31 mm: ±2,5 mm > 31 mm: ±3,0 mm
---------------------	--

Length tolerance	±1,5 %
------------------	--------

Tube – slit. Black. 2m Length

9 mm			13 mm			19 mm			25 mm		
Pipe Ø [mm]	Item	Content [metric]	Pipe Ø [mm]	Item	Content [metric]	Pipe Ø [mm]	Item	Content [metric]	Pipe Ø [mm]	Item	Content [metric]
10	AF-CO-09X010-SLT	266 m	10	AF-CO-13X010-SLT	172 m	10	AF-CO-19X010-SLT	92 m	12	AF-CO-25X012-SLT	54 m
12	AF-CO-09X012-SLT	234 m	12	AF-CO-13X012-SLT	162 m	12	AF-CO-19X012-SLT	84 m	15	AF-CO-25X015-SLT	48 m
15	AF-CO-09X015-SLT	200 m	15	AF-CO-13X015-SLT	122 m	15	AF-CO-19X015-SLT	72 m	20	AF-CO-25X020-SLT	38 m
20	AF-CO-09X020-SLT	140 m	20	AF-CO-13X020-SLT	104 m	20	AF-CO-19X020-SLT	58 m	22	AF-CO-25X022-SLT	40 m
22	AF-CO-09X022-SLT	140 m	22	AF-CO-13X022-SLT	100 m	22	AF-CO-19X022-SLT	56 m	28	AF-CO-25X028-SLT	36 m
28	AF-CO-09X028-SLT	98 m	28	AF-CO-13X028-SLT	82 m	28	AF-CO-19X028-SLT	48 m	35	AF-CO-25X035-SLT	24 m
35	AF-CO-09X035-SLT	76 m	35	AF-CO-13X035-SLT	60 m	35	AF-CO-19X035-SLT	36 m	42	AF-CO-25X042-SLT	24 m
42	AF-CO-09X042-SLT	64 m	42	AF-CO-13X042-SLT	50 m	42	AF-CO-19X042-SLT	32 m	48	AF-CO-25X048-SLT	20 m
48	AF-CO-09X048-SLT	54 m	48	AF-CO-13X048-SLT	42 m	48	AF-CO-19X048-SLT	28 m	54	AF-CO-25X054-SLT	18 m
54	AF-CO-09X054-SLT	52 m	54	AF-CO-13X054-SLT	38 m	54	AF-CO-19X054-SLT	24 m	60	AF-CO-25X060-SLT	18 m
60	AF-CO-09X060-SLT	48 m	60	AF-CO-13X060-SLT	32 m	60	AF-CO-19X060-SLT	24 m	67	AF-CO-25X067-SLT	16 m
-	-	-	67	AF-CO-13X067-SLT	34 m	67	AF-CO-19X067-SLT	20 m	76	AF-CO-25X076-SLT	12 m
-	-	-	76	AF-CO-13X076-SLT	28 m	76	AF-CO-19X076-SLT	18 m	80	AF-CO-25X080-SLT	12 m
-	-	-	80	AF-CO-13X080-SLT	20 m	80	AF-CO-19X080-SLT	16 m	89	AF-CO-25X089-SLT	12 m



Tube – slit. Black. 2m Length

9 mm			13 mm			19 mm			25 mm		
Pipe Ø [mm]	Item	Content [metric]	Pipe Ø [mm]	Item	Content [metric]	Pipe Ø [mm]	Item	Content [metric]	Pipe Ø [mm]	Item	Content [metric]
-	-	-	89	AF-CO-13X089-SLT	20 m	89	AF-CO-19X089-SLT	16 m	93	AF-CO-25X093-SLT	12 m
-	-	-	93	AF-CO-13X093-SLT	20 m	93	AF-CO-19X093-SLT	16 m	108	AF-CO-25X108-SLT	8 m
-	-	-	108	AF-CO-13X108-SLT	20 m	108	AF-CO-19X108-SLT	16 m	114	AF-CO-25X114-SLT	10 m
-	-	-	114	AF-CO-13X114-SLT	20 m	114	AF-CO-19X114-SLT	14 m	-	-	-

Other information

**Thickness tolerance**                    ≤ 8 mm: ±1,0 mm  
     9 - 18 mm: ±1,5 mm  
     19 - 31 mm: ±2,5 mm  
     > 31 mm: ±3,0 mm

**Length tolerance**                    ±1,5 %

Tube – slit. Black. 2m Length

32 mm		
Pipe Ø [mm]	Item	Content [metric]
15	AF-CO-32X015-SLT	32 m
22	AF-CO-32X022-SLT	24 m
28	AF-CO-32X028-SLT	24 m
35	AF-CO-32X035-SLT	18 m
42	AF-CO-32X042-SLT	18 m
48	AF-CO-32X048-SLT	18 m
54	AF-CO-32X054-SLT	12 m
60	AF-CO-32X060-SLT	10 m
67	AF-CO-32X067-SLT	12 m
76	AF-CO-32X076-SLT	10 m
89	AF-CO-32X089-SLT	10 m
114	AF-CO-32X114-SLT	8 m

Other information

**Thickness tolerance**                    ≤ 8 mm: ±1,0 mm  
     9 - 18 mm: ±1,5 mm  
     19 - 31 mm: ±2,5 mm  
     > 31 mm: ±3,0 mm

**Length tolerance**                    ±1,5 %

Coil. 15m Length

Pipe Ø [mm]	Item	Content [metric]	Pipe Ø [mm]	Item	Content [metric]
6	AF-CO-09X006/E-15	180 m	6	AF-CO-13X006/E-15	135 m
10	AF-CO-09X010/E-15	150 m	10	AF-CO-13X010/E-15	105 m
12	AF-CO-09X012/E-15	135 m	12	AF-CO-13X012/E-15	90 m
15	AF-CO-09X015/E-15	135 m	15	AF-CO-13X015/E-15	90 m
20	AF-CO-09X020/E-15	105 m	20	AF-CO-13X020/E-15	90 m

Coil. 15m Length

Pipe Ø [mm]	Item	Content [metric]	Pipe Ø [mm]	Item	Content [metric]
22	AF-CO-09X022/E-15	90 m	22	AF-CO-13X022/E-15	75 m
28	AF-CO-09X028/E-15	75 m	28	AF-CO-13X028/E-15	60 m

Coil. AC Coils

Pipe Ø [mm]	Item	Content [metric]	Pipe Ø [mm]	Item	Content [metric]	Pipe Ø [mm]	Item	Content [metric]
10	AF-CO-06X010/E	75 m	6	AF-CO-09X006/E	70 m	6	AF-CO-13X006/E	45 m
15	AF-CO-06X015/E	55 m	10	AF-CO-09X010/E	50 m	10	AF-CO-13X010/E	35 m
-	-	-	12	AF-CO-09X012/E	45 m	12	AF-CO-13X012/E	32 m
-	-	-	15	AF-CO-09X015/E	40 m	15	AF-CO-13X015/E	28 m
-	-	-	20	AF-CO-09X020/E	34 m	20	AF-CO-13X020/E	28 m
-	-	-	22	AF-CO-09X022/E	30 m	22	AF-CO-13X022/E	26 m
-	-	-	28	AF-CO-09X028/E	26 m	28	AF-CO-13X028/E	20 m

Accessories

Item	Description	Content [metric]
AF-EVO-10MM	10mm thick sheet, 2,0 x 0.5m	13 m <sup>2</sup>
AF-EVO-13MM	13mm thick sheet, 2,0 x 0.5m	9 m <sup>2</sup>
AF-EVO-16MM	16mm thick sheet, 2,0 x 0.5m	8 m <sup>2</sup>
AF-EVO-19MM	19mm thick sheet, 2,0 x 0.5m	7 m <sup>2</sup>
AF-EVO-25MM	25mm thick sheet, 2,0 x 0.5m	5 m <sup>2</sup>
AF-EVO-32MM	32mm thick sheet, 2,0 x 0.5m	4 m <sup>2</sup>
AF-EVO-50MM	50mm thick sheet, 2,0 x 0.5m	3 m <sup>2</sup>
AF-EVO-10MM/A	10mm thick self-adhesive sheet, 2,0 x 0.5m	13 m <sup>2</sup>
AF-EVO-13MM/A	13mm thick self-adhesive sheet, 2,0 x 0.5m	9 m <sup>2</sup>
AF-EVO-19MM/A	19mm thick self-adhesive sheet, 2,0 x 0.5m	7 m <sup>2</sup>
AF-EVO-25MM/A	25mm thick self-adhesive sheet, 2,0 x 0.5m	5 m <sup>2</sup>
AF-EVO-32MM/A	32mm thick self-adhesive sheet, 2,0 x 0.5m	4 m <sup>2</sup>
AF-EVO-50MM/A	50mm thick self-adhesive sheet, 2,0 x 0.5m	3 m <sup>2</sup>
AF-EVO-03MM/E	3mm thick continuous sheet, 1m x 30m	30 m <sup>2</sup>
AF-EVO-06MM/E	6mm thick continuous sheet, 1m x 15m	15 m <sup>2</sup>
AF-EVO-10MM/E	10mm thick continuous sheet, 1m x 10m	10 m <sup>2</sup>
AF-EVO-13MM/E	13mm thick continuous sheet, 1m x 8m	8 m <sup>2</sup>
AF-EVO-16MM/E	16mm thick continuous sheet, 1m x 7m	7 m <sup>2</sup>
AF-EVO-19MM/E	19mm thick continuous sheet, 1m x 5m	5 m <sup>2</sup>
AF-EVO-25MM/E	25mm thick continuous sheet, 1m x 4m	4 m <sup>2</sup>
AF-EVO-32MM/E	32mm thick continuous sheet, 1m x 3m	3 m <sup>2</sup>
AF-EVO-50MM/E	50mm thick continuous sheet, 1m x 5m	5 m <sup>2</sup>
AF-EVO-03MM/EA	3mm thick continuous self-adhesive sheet, 1m x 30m	30 m <sup>2</sup>
AF-EVO-06MM/EA	6mm thick continuous self-adhesive sheet, 1m x 15m	15 m <sup>2</sup>
AF-EVO-10MM/EA	10mm thick continuous self-adhesive sheet, 1m x 10m	10 m <sup>2</sup>
AF-EVO-13MM/EA	13mm thick continuous self-adhesive sheet, 1m x 8m	8 m <sup>2</sup>
AF-EVO-16MM/EA	16mm thick continuous self-adhesive sheet, 1m x 7m	7 m <sup>2</sup>

**Accessories**

Item	Description	Content [metric]
AF-EVO-19MM/EA	19mm thick continuous self-adhesive sheet, 1m x 5m	5 m <sup>2</sup>
AF-EVO-25MM/EA	25mm thick continuous self-adhesive sheet, 1m x 4m	4 m <sup>2</sup>
AF-EVO-32MM/EA	32mm thick continuous self-adhesive sheet, 1m x 3m	3 m <sup>2</sup>

**Adhesives and Cleaners**

Item	Description	Content [quantity]
ADH520/0,25E	0.25 litre tins of ArmaFlex 520 adhesive with built-in brush, packed in a carton.	24 tin
ADH520/1,0E	1.0 litre tins of ArmaFlex 520 adhesive packed in a carton.	12 tin
ADH520/2,5E	2.5 litre tins of ArmaFlex 520 adhesive packed in a carton.	8 tin
ADH-525/0,25	0,25 litre tins packed in a carton.	40 tin
ADH-525/0,5	0,5 litre tins packed in a carton.	12 tin
ADH-525/1,0	1.0 litre tins packed in a carton.	12 tin
ADH-525/2,5	2.5 litre tins packed in a carton.	8 tin
SF-CLEANER/1,0	Solvent-free cleaner for use with ArmaFlex	6 tin

All data and technical information are based on results achieved under the specific conditions defined according to the testing standards referenced. Despite taking every precaution to ensure that said data and technical information are up to date, Armacell does not make any representation or warranty, express or implied, as to the accuracy, content or completeness of said data and technical information. Armacell also does not assume any liability towards any person resulting from the use of said data or technical information. Armacell reserves the right to revoke, modify or amend this document at any moment. It is the customer's responsibility to verify if the product is suitable for the intended application. The responsibility for professional and correct installation and compliance with relevant building regulations lies with the customer. This document does not constitute nor is part of a legal offer to sell or to contract.

At Armacell, your trust means everything to us, so we want to let you know your rights and make it easier for you to understand what information we collect and why we collect it. If you would like to find out about our processing of your data, please visit our Data Protection Policy.

Trademarks followed by © or ™ are trademarks of the Armacell Group. © Armacell, 2024. All rights reserved.

ArmaFlex | AF/ArmaFlex Evo [Nominal] | Brochure | 042024 | en-GB

## ABOUT ARMACELL

---

As the inventor of flexible foam for equipment insulation and a leading provider of engineered foams, Armacell develops innovative and safe thermal and mechanical solutions that create sustainable value for its customers. Armacell's products significantly contribute to global energy efficiency making a difference around the world every day. With more than 3,300 employees and 25 production plants in 19 countries, the company operates two main businesses, Advanced Insulation and Engineered Foams. Armacell focuses on insulation materials for technical equipment, high-performance foams for acoustic and lightweight applications, recycled PET products, next-generation aerogel technology and passive fire protection systems.



For more information, please visit:  
[www.armacell.com](http://www.armacell.com)