




## INSULATION FOR THE OIL AND GAS INDUSTRY

# ArmaSound Barrier H

Mass loaded noise barrier engineered for applications with metal jacketing

- // Excellent at reducing the transmission of airborne sound
- // Enhances the insertion loss performance of pipe insulation
- // Flexible, easy to install
- // Mean sound reduction index  $R \geq 28$  dB
- // Free of lead, unrefined aromatic oils and bitumen
- // Compliant to ISO 15665 Classes A, B and C and Shell DEP 31.46.00.31- Gen Class D
- // Satisfies acoustic classes 6, 7 and 8 according to NORSOK R-004

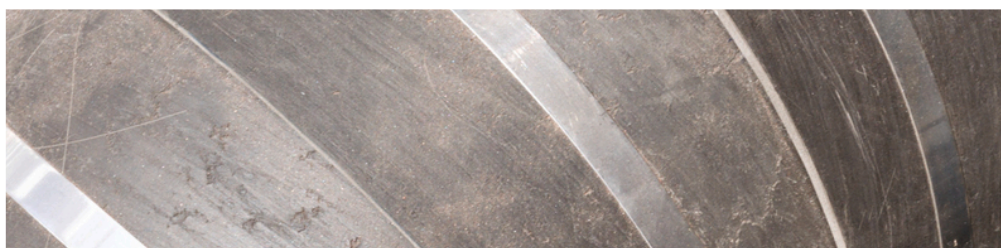

 **armacell**<sup>®</sup>  
ArmaSound<sup>®</sup>

## TECHNICAL DATA - ARMASOUND BARRIER H

Brief description	High performance mass loaded sound barrier for a quieter environment
Material type	Vinyl sound barrier mat. Thermoplastic polymer compound.
Product colour range	Black
Special features	Does not contain lead, unrefined aromatic oils and bitumen.
Product range	Sheets / rolls in 2, 3 and 4 mm thickness (nominal values).
Applications	Flexible sheet for noise control engineered specifically or applications with metal jacketing.
Installation	Please refer to the ArmaSound Industrial Systems application manual before installation. Please contact Technical Services.

Property	Value / Assessment	Standard / Test method
<b>Temperature range</b>		
Service temperature <sup>1</sup>	Min. °C	Min. °F
	Max. °C	Max. °F
	-20	-4
	93	185
<b>Fire performance</b>		
Practical fire behaviour	Self-extinguishing, burn rate (flame progression) < 100 mm/min.	FMVSS 302
<b>Physical attributes</b>		
Mass per unit area	2mm: 4.8 to 5.50 kg/m <sup>2</sup> (0,98 to 1.13 lb/ft <sup>2</sup> ) 3mm: 7.2 to 8.25 kg/m <sup>2</sup> (1.47 to 1.69 lb/ft <sup>2</sup> ) 4mm: 9.7 to 11.0 kg/m <sup>2</sup> (1.99 to 2.25 lb/ft <sup>2</sup> )	
<b>Mechanical properties</b>		
Tensile strength	≥ 1.8 MPa (≥ 261 psi)	ISO 37 <sup>2</sup>
Elongation	≥ 25%	ISO 37 <sup>2</sup>
<b>Acoustic performance</b>		
System acoustic insertion loss	When used with metal cladding and approved non-Armacell acoustic insulation: ArmaSound Barrier H complies to ISO 15665 Classes A, B and C and Shell DEP 31.46.00.31 - Gen Class D.	ASTM E1222, ISO 15665, ISO 3741
<b>Other technical features</b>		
Application conditions <sup>4,5</sup>	Application temperature: +5 to +35°C (+41 to 95°F) Max. relative humidity: 80%	
Shelf life <sup>6</sup>	Max. 3 years	
Storage	Material shall be stored indoors, in clean and dry conditions, away from direct sunlight.	

<sup>1</sup> Intermittent maximum operating temperature. Continuous maximum operating temperature +65°C. For further information, please contact technical customer service.

<sup>2</sup> Type 1 dumb-bell test piece. Maximum specimen thickness according to the test standard is 3mm.

<sup>3</sup> Nominal values.

<sup>4</sup> Application temperature refers to the ambient temperature during installation and the surface temperature of the substrate (e.g. ArmaClad Arma-Chek R covering) to which the product is installed.

<sup>5</sup> For environmental conditions outside the given range, please contact Technical Services.

<sup>6</sup> Shelf life (maximum storage time) is limited to ensure that only currently manufactured products are installed on projects. This limitation is restricted solely to storage of the product and does not affect the lifetime of product after it has been installed.

**Sheet – standard. Black**

Item	Thickness [mm]	Width [m]	Length [m]	Content [metric]
ASD-BAR-H-02	2	1.25	2	2.5 m <sup>2</sup>
ASD-BAR-H-03	3	1.25	2	2.5 m <sup>2</sup>
ASD-BAR-H-04	4	1.25	2	2.5 m <sup>2</sup>

**Other information**

**Remarks** Make to order items. Minimum Order Quantity (MOQ) = 2 pallets.  
ASD-BAR-H-02 (MOQ) = 160 sheets, ASD-BAR-H-03 (MOQ) = 100 sheets, ASD-BAR-H-04 (MOQ) = 84 sheets.  
Other dimensions can be produced on request.

**Roll - jumbo. Black**

Item	Thickness [mm]	Width [m]	Length [m]	Content [metric]
ASD-BAR-H-03/50	3	1.25	50	62.5 m <sup>2</sup>

**Other information**

**Remarks** Make to order item. Minimum Order Quantity = 4 rolls.  
Other dimensions can be produced on request.

All data and technical information are based on results achieved under the specific conditions defined according to the testing standards referenced. Despite taking every precaution to ensure that said data and technical information are up to date, Armacell does not make any representation or warranty, express or implied, as to the accuracy, content or completeness of said data and technical information. Armacell also does not assume any liability towards any person resulting from the use of said data or technical information. Armacell reserves the right to revoke, modify or amend this document at any moment. It is the customer's responsibility to verify if the product is suitable for the intended application. The responsibility for professional and correct installation and compliance with relevant building regulations lies with the customer. This document does not constitute nor is part of a legal offer to sell or to contract.

At Armacell, your trust means everything to us, so we want to let you know your rights and make it easier for you to understand what information we collect and why we collect it. If you would like to find out about our processing of your data, please visit our Data Protection Policy.

Trademarks followed by © or ™ are trademarks of the Armacell Group. © Armacell, 2023 All rights reserved.

ArmaSound | ArmaSound Barrier H | Brochure | 052024 | en-GB

## ABOUT ARMACELL

---

As the inventor of flexible foam for equipment insulation and a leading provider of engineered foams, Armacell develops innovative and safe thermal and mechanical solutions that create sustainable value for its customers. Armacell's products significantly contribute to global energy efficiency making a difference around the world every day. With more than 3,300 employees and 25 production plants in 19 countries, the company operates two main businesses, Advanced Insulation and Engineered Foams. Armacell focuses on insulation materials for technical equipment, high-performance foams for acoustic and lightweight applications, recycled PET products, next-generation aerogel technology and passive fire protection systems.



For more information, please visit:  
[www.armacell.com](http://www.armacell.com)